CE c(UL)us US

Model Number

**CBB8-18GS75-E2-V1**

Features

- **8 mm flush**
- **The switching distance can be set over a wide range with the potentiometer**

Connection

1 — L+
4
3 — L-

Pinout

1
4
3

Wire colors in accordance with EN 60947-5-2

1	BN	(brown)
3	BU	(blue)
4	BK	(black)

Accessories

BF 18
Mounting flange, 18 mm

V1-W-2M-PUR
Female cordset, M12, 4-pin, PUR cable
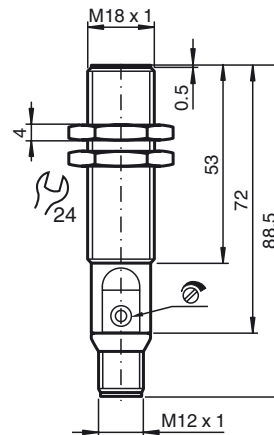
V1-G-2M-PUR
Female cordset, M12, 4-pin, PUR cable

V1-W
Female connector, M12, 4-pin, field attachable

V1-G
Female connector, M12, 4-pin, field attachable

Dimensions

M18 x 1
0.5
4
53
72
88.5
24
M12 x 1

Technical Data

General specifications

Switching element function		PNP NO
Rated operating distance	s_n	1 ... 8 mm
Installation		flush
Output polarity		DC

Nominal ratings

Operating voltage	U_B	10 ... 30 V
Switching frequency	f	0 ... 100 Hz
Reverse polarity protection		reverse polarity protected
Short-circuit protection		pulsing
Voltage drop	U_d	≤ 1.5 V
Temperature drift		max. 20 % at -5 ... 55 °C (23 ... 131 °F)
Operating current	I_L	0 ... 100 mA
No-load supply current	I_0	≤ 18 mA
Time delay before availability	t_v	≤ 300 ms

Indicators/operating means

LED green	Operating display
LED yellow	indication switching state
Potentiometer	sensitivity adjustment

Ambient conditions

Ambient temperature	-25 ... 85 °C (-13 ... 185 °F)

Mechanical specifications

Connection type	Connector M12 x 1 , 3-pin
Housing material	Stainless steel 1.4305 / AISI 303
Sensing face	PBT
Protection degree	IP67

Compliance with standards and directives

Standard conformity	
Standards	EN 60947-5-2:2007
	IEC 60947-5-2:2007

Approvals and certificates

UL approval	cULus Listed, General Purpose
CCC approval	CCC approval / marking not required for products rated ≤36 V

Subject to modifications without notice
Copyright Pepperl+Fuchs
Pepperl+Fuchs Group   USA: +1 330 486 0001   Germany: +49 621 776-4411   Singapore: +65 6779 9091
www.pepperl-fuchs.com   fa-info@us.pepperl-fuchs.com   fa-info@de.pepperl-fuchs.com   fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS
SENSING YOUR NEEDS   **1**