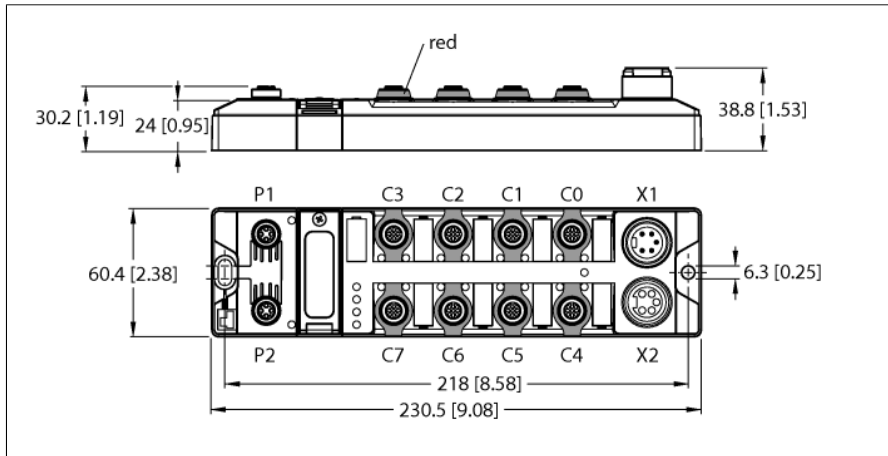


**Block Module for EtherNet/IP and CIP Safety**  
**Safe Digital Inputs and Outputs**  
**TBIP-L4-4FDI-4FDX**



- Ethernet/IP
- Integrated Ethernet switch
- 10 Mbps/100 Mbps supported
- 2 × M12, 4-pin, D-coded, Ethernet fieldbus connection
- Glass fiber reinforced housing
- Shock and vibration tested
- Fully potted module electronics
- Protection classes IP65, IP67, IP69K
- 7/8", 4-pin connectors for power supply
- Four safe digital SIL3 inputs
- Four safe configurable digital SIL3 inputs or outputs

**Type designation** TBIP-L4-4FDI-4FDX  
**Ident no.** 100001827

**Supply**  
Supply voltage 24 VDC  
Admissible range 20.4...28.8 VDC  
Voltage supply connection 4-pin male 7/8" connector X1  
Electrical isolation galvanic isolation of the voltage groups V1 and V2, voltages up to 500 VAC

**System data**  
Fieldbus transmission rate 10 Mbps/100 Mbps  
Fieldbus connection technology 2 × M12, 4-pin, reverse-keyed  
Web server integrated  
Service interface Ethernet via P1 or P2


**Ethernet/IP**  
Addressing acc. to EtherNet/IP specification  
Quick Connect (QC) < 150 ms  
Device Level Ring (DLR) supported  
Class 1 connections (CIP) 3

**Safety Data**  
PL acc. to DIN EN 13849-1:2008 e  
Category acc. to DIN EN 13849-1:2008 4  
SIL according IEC 61508 3  
Useful Lifetime 20 years (EN ISO 13849-1)


**Safety Inputs OSSD**  
Low level signal voltage EN 61131-2 Type 1 (< 5 V; < 0.5 mA)  
High level signal voltage EN 61131-2 Type 1 (> 15 V; > 2 mA)  
Max. OSSD supply per channel 2 A per C0 to C7, 1.5 A at 70 °C  
Please consider derating as shown in figure 1  
Max. tolerance test pulse width 1 ms  
Interval between 2 test pulses, minimum 20 ms at 1 ms test pulse width 15 ms at 0.5 ms test pulse width

**Safety Inputs floating/antivalent**  
Max. loop resistance < 150 Ω  
Max. cable length max. 1 μF at 150 Ω limited by line capacity  
Test pulse, typical 0.6 ms  
Test pulse, maximum 0.8 ms  
Sensor supply Power supply V AUX1/T1 max. 2 A  
Please consider derating as shown in figure 1  
Interval between 2 test pulses, minimum 900 ms  
Additional information No connection to external potential allowed

**Figure 1**

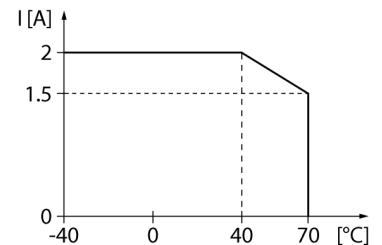

**Figure 2**

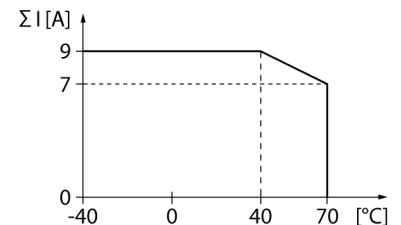

# Block Module for EtherNet/IP and CIP Safety

## Safe Digital Inputs and Outputs

### TBIP-L4-4FDI-4FDX

---

#### Safety Outputs

Output current in off state	< 5 V
Output current in off state	< 1 mA
	suitable for inputs according to EN 61131-2 Type 1
Test pulse, typical	0.5 ms
Test pulse, maximum	1.25 ms
Interval between 2 test pulses, typical	500 ms
Interval between 2 test pulses, minimum	250 ms
Actuator power supply	Power supply V AUX1/T1 max. 2 A
	Please consider derating as shown in figure 1
Max. output current	2 A (resistive)
	1 A (inductive)
Additional information	The load must be mechanically or electrically inert to tolerate the test pulses.
	When configured as a PPM switching output the negative pole of the load should be wired to the M-terminal of the corresponding output (Pin 2).

---

#### Digital inputs

Connectivity inputs	M12, 5-pin
Input type	PNP
Switching threshold	EN 61131-2 Typ 3, PNP
Low level signal voltage	< 5 V
High level signal voltage	> 11 V
Low level signal current	< 1.5 mA
High level signal current	> 2 mA
Input delay	2.5 ms
Electrical isolation	Galvanically isolated to the fieldbus
	Voltage proof up 500 VDC

---

#### Digital outputs

Connectivity outputs	M12, 5-pol
Output type	PNP
Type of output diagnostics	Channel diagnostics
Output voltage	24 VDC from potential group
Load type	EN 60947-5-1: DC-13
Short-circuit protection	yes
Electrical isolation	Galvanically isolated to the fieldbus
	Voltage proof up 500 VDC

---

#### Standard/Directive conformity

Directive	2006/42/EC Machine Directive
	2014/30/EC EMC Directive
	2014/35/EC Low Voltage Directive
Vibration test	acceleration to 20 g
	acc. to EN 60068-2-6
Shock test	acc. to EN 60068-2-27
Drop and topple	acc. to EN 60068-2-31/IEC 60068-2-32
Electromagnetic compatibility	acc. to EN 61131-2
Approvals and certificates	CE,
	FCC,
	UV-resistant in accordance with DIN EN ISO
	4892-2A (2013)
UL Certificate	cULus LISTED 21 W2, Encl.Type 1 IND.CONT.EQ.

## Block Module for EtherNet/IP and CIP Safety

### Safe Digital Inputs and Outputs

#### TBIP-L4-4FDI-4FDX

---

**General Information**

Dimensions (W x L x H)	60.4 x 230.4 x 39mm
Operating temperature	-40...+70 °C
Storage temperature	-40 °C ... +85 °C
Altitude	max. 5000 m
Protection class	IP65 IP67 IP69K
Housing material	PA6-GF30
Housing color	Black
Window material	Lexan
Material screw	303 stainless steel
Material label	Polycarbonate
Halogen-free	yes
Mounting	2 mounting holes □ 6.3 mm








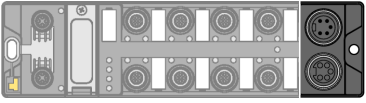
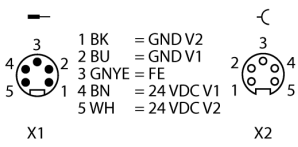
---

The data sheet serves as advance information. For definitive values see the corresponding product manual. In this respect, no liability for completeness and accuracy can be applied to the content of this data sheet.

# Block Module for EtherNet/IP and CIP Safety

## Safe Digital Inputs and Outputs

### TBIP-L4-4FDI-4FDX

	<p><b>Note</b> Ethernet cable (example): RSSD-RSSD-441-2M/S2174 Ident. no. 6914218</p>	<p>M12 × 1 Ethernet</p>  <p>1 = TX + 2 = RX + 3 = TX - 4 = RX - flange = FE</p> <p>P1</p>  <p>1 = RX + 2 = TX + 3 = RX - 4 = TX - flange = FE</p> <p>P2</p>
	<p><b>Note</b> Actuator and sensor cable/PUR connection cable (example): RKC4.5T-2-RSC4.5T/TXY Ident. no. 6629805</p>	<p>M12 × 1 Safety Inputs</p>  <p>1 = V<sub>aux</sub>1/T1 2 = FDI (T2) 3 = GND (V1) 4 = FDI (T1) 5 = T2</p>
	<p><b>Note</b> Actuator and sensor cable/PUR connection cable (example): RKC4.5T-2-RSC4.5T/TXY Ident. no. 6629805</p>	<p>M12 × 1 Safety I/O Port</p>  <p>1 = V<sub>aux</sub>1/T1 2 = FDO-/FDI (T2) 3 = GND (V1) 4 = FDO+/FDI (T1) 5 = T2</p>
	<p><b>Note</b> Power supply cable (example): RKM52-1-RSM52 Ident. no. 6914149</p>	<p>7/8" Power Supply</p>  <p>1 BK = GND V2 2 BU = GND V1 3 GNYE = FE 4 BN = 24 VDC V1 5 WH = 24 VDC V2</p> <p>X1                      X2</p>

## Block Module for EtherNet/IP and CIP Safety

### Safe Digital Inputs and Outputs

#### TBIP-L4-4FDI-4FDX

##### Module Status LED

LED	Color	Status	Description
ETH1 / ETH2	Green	On	Ethernet Link (100 Mbps)
		flashing	Ethernet communication (100 Mbps)
		Off	No Ethernet link
NS	Green	On	Active connection to a master
		flashing	Connection has been established but not fully completed
	Red	On	Communication Error
		flashing	One or more I/O connections have the time-out status.
Red/Green	Alternating	Faulty self-test or configuration	
MS	Green	On	Diagnostics disabled
	Green	Flashing	When used as a stand-alone device: Device is in protective mode, an EtherNet/IP™ client is accessing the standard I/Os.
	Red	On	Critical error
	Red	Flashing	Correctable error
	Green/Red	Flashing alternately	Faulty self-test or configuration
PWR	Green	On	Voltage OK
	Red	On	Voltage faulty
WINK	White	Flashing	Supports the blink/wink commands

##### LED Status I/O

LED	Color	Status	Description
0...7	Green	On	Channel active
		flashing	Self test
	Red	On	Discrepancy
		flashing	Cross circuit
8...15	Green	On	Channel active
		flashing	Self test (input only)
	Red	On	Discrepancy, overload (output only)
		flashing	Cross circuit

# Block Module for EtherNet/IP and CIP Safety

## Safe Digital Inputs and Outputs

### TBIP-L4-4FDI-4FDX

#### Process Data Mapping of the Single Protocols

For more details on the corresponding protocols see manual.