




Product designation	Switch disconnecter			
Product type designation	P1MS			
Number of poles	1P			
Number of DIN modules	1			
Compliance	IEC			
Electrical features				
Rated insulation voltage U_i IEC/EN	V	1000		
Rated impulse withstand voltage U_{imp}	kV	4		
Rated operational voltage AC (IEC)	VAC	230...240		
Rated frequency	Hz	50/60		
Rated current (I_n)	A	63		
Ambient conditions				
Operating temperature	min	°C	-25	
	max	°C	+70	
Storage temperature	min	°C	-25	
	max	°C	+70	
Max altitude	m	2000		
Mechanical features				
Operating position	normal		Vertical plan	
			35mm DIN rail	
Fixing	35mm DIN rail			
Tightening torque for terminals	min	Nm	3.2	
	max	Nm	3.5	
	min	lbin	28.3	
	max	lbin	31	
Terminals tool	Pz2			
Conductor section	IEC	min	mm ²	1
		max	mm ²	50
	AWG/Kcmil	min	16	
		max	1	
Mechanical life	cycles		20000	
Weight	g		83	
Pollution degree	3			

Dimensions

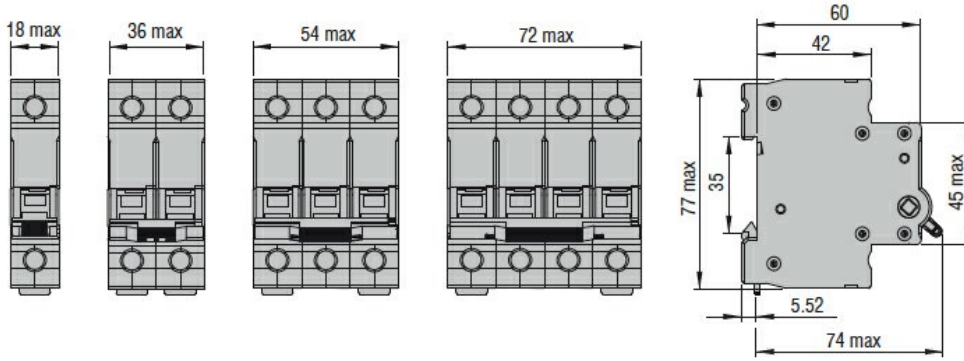

Wiring diagrams



Certifications and compliance

Compliance

IEC/EN/BS 60947-3.

Certifications

EAC

TÜV-Rheinland

ETIM classification

ETIM 8.0

EC000042 -
 Miniature circuit
 breaker (MCB)