




Product designation	Switch disconnecter			
Product type designation	P1MS			
Number of poles	2P			
Number of DIN modules	2			
Compliance	IEC			
<b>Electrical features</b>				
Rated insulation voltage $U_i$ IEC/EN	V	1000		
Rated impulse withstand voltage $U_{imp}$	kV	4		
Rated operational voltage AC (IEC)	VAC	400...440		
Rated frequency	Hz	50/60		
Rated current ( $I_n$ )	A	40		
<b>Ambient conditions</b>				
Operating temperature	min	°C	-25	
	max	°C	+70	
Storage temperature	min	°C	-25	
	max	°C	+70	
Max altitude	m	2000		
<b>Mechanical features</b>				
Operating position	normal		Vertical plan	
			35mm DIN rail	
Fixing	35mm DIN rail			
Tightening torque for terminals	min	Nm	3.2	
	max	Nm	3.5	
	min	lbin	28.3	
	max	lbin	31	
Terminals tool	Pz2			
Conductor section	IEC	min	mm <sup>2</sup>	1
		max	mm <sup>2</sup>	50
	AWG/Kcmil	min	16	
		max	1	
Mechanical life	cycles		20000	
Weight	g		170	
Pollution degree	3			
<b>Dimensions</b>				



**Wiring diagrams**

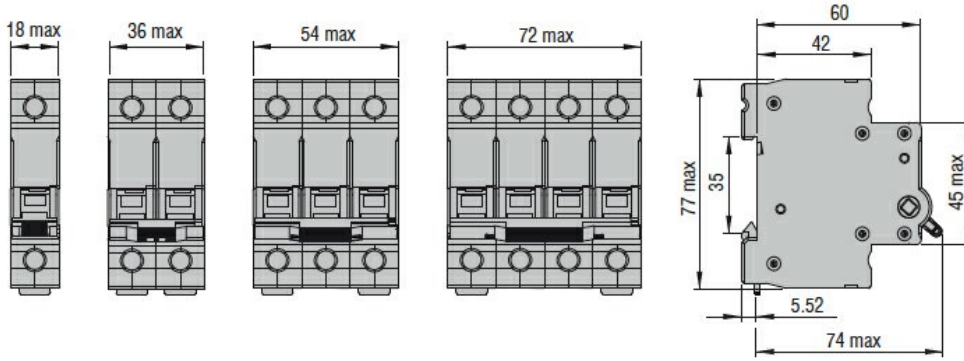

**Certifications and compliance**

Compliance

IEC/EN/BS 60947-3.

Certifications

EAC

TÜV-Rheinland

**ETIM classification**

ETIM 8.0

EC000042 -  
 Miniature circuit  
 breaker (MCB)