




FEMALE CONNECTOR – END VIEW

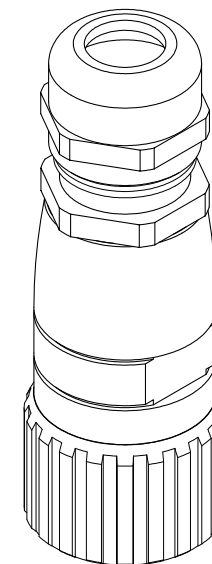

SPECIFICATIONS

CONTACT CARRIER MATERIAL	PBT OR NYLON
CONTACT MATERIAL/PLATING	GOLD-PLATED BRASS
COUPLING NUT MATERIAL/PLATING	NICKEL-PLATED BRASS
GASKET	PERBUNAN OR FLUOR RUBBER
RATED CURRENT [A]	8.0 A
RATED VOLTAGE [V]	300 V
MAX. CONDUCTORS SIZE	12/18 AWG
TERMINATION METHOD	SOLDER
TEMPERATURE	-40°C to 125°C (-40°F to 257°F)
PROTECTION CLASS	IEC IP 65
CABLE DIAMETERS	7mm (.726") TO 10mm (.394")

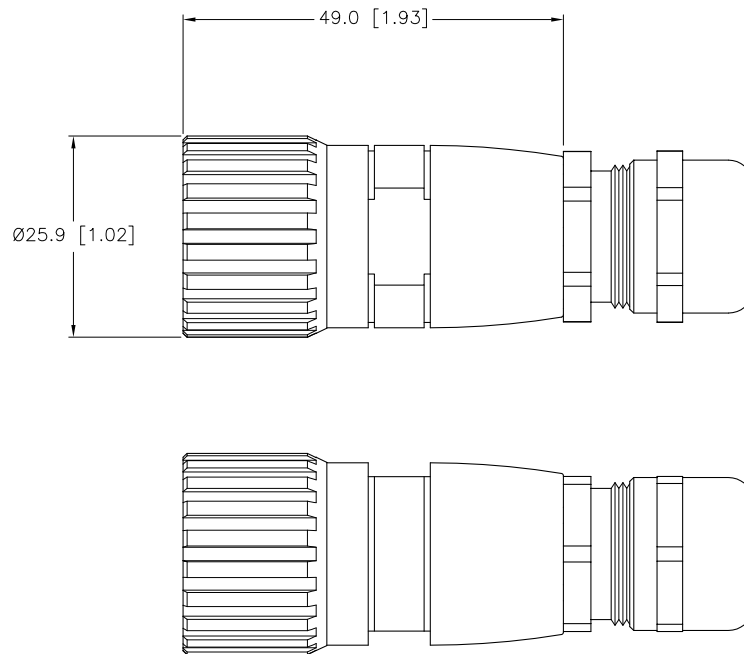

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		<b>TURCK INC</b> High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1.			ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RDS	DATE	02/06/02
2.				DSGN		SCALE	1=1.0
3.				UNIT OF MEASUREMENT		IDENTIFICATION NO.	
4.				MILLIMETER [ INCH ]		U0105	
MATERIAL		CONTACT TURCK FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING		REV	
FINISH						A	
B	UPDATE DRAWING TO REPRESENT ACTUAL PRODUCT	RDS	02/07/02	T5157	FILE: U0105		SHEET 1 OF 1
REV	DESCRIPTION	BY	DATE	ECO NO.			

B	UPDATE DRAWING TO REPRESENT ACTUAL PRODUCT	RDS	02/07/02	T5157
REV	DESCRIPTION	BY	DATE	ECO NO.