


Product designation				Fuse holder
Product type designation				FB
Number of DIN modules				3
Operating voltage type				AC
Electrical features				
Rated current (In)	A			32
Rated operational voltage	V			690
IEC Utilization category				AC22B 500V - AC21B 690V
Total power dissipation	W			3
Derating factor of rated current In for different ambient temperature				
	20°C			1
	30°C			0.95
	40°C			0.9
	50°C			0.8
	60°C			0.7
	70°C			0.5
Derating factor of rated current In for side by side fuse holders (poles)				
	1-4			1
	5-6			0.8
	7-9			0.7
	≥10			0.6
Ambient conditions				
Operating temperature	min	°C	-40	
	max	°C	70	
Storage temperature	min	°C	-40	
	max	°C	80	
Max altitude			m	3000
Mechanical features				
Operating position	normal allowable		Vertical plan Any	
Mounting				35mm DIN rail
Tightening torque for terminals	max	Nm	2.5	
	max	lbft	1.8	
Conductor section			mm ²	
	- Flexible max (IEC)			16
	- Flexible max (AWG)			8
	- Rigid max (IEC)	mm ²	16	
	- Rigid max (AWG)			8
Weight				g 247
Frontal IP degree				IP20
Dimensions				

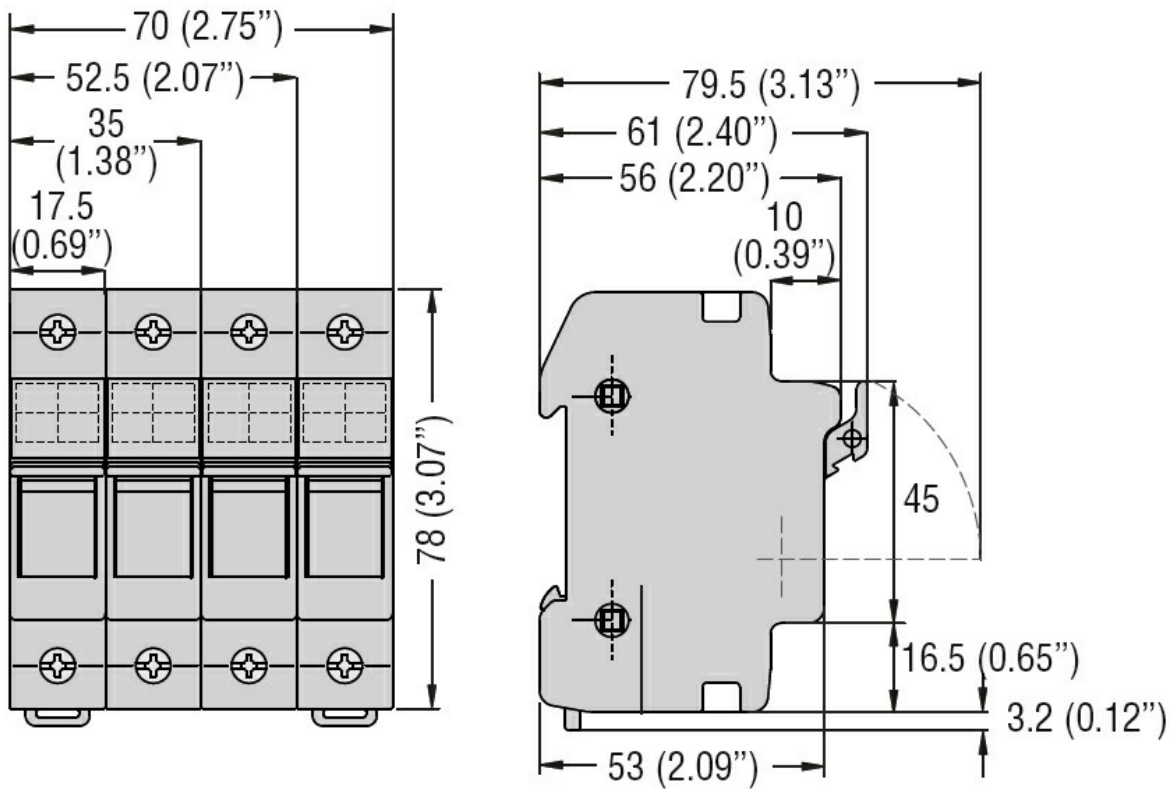

Certifications and compliance

Compliance

- IEC/EN 60269-1
- IEC/EN 6069-2
- IEC/EN 60947-1
- IEC/EN 60947-3

Certifications

EAC