




Product designation				Fourth pole
Product type designation				GLX42
Number of poles		Nr.	1	
Operating voltage type			AC	
Contact characteristics				
IEC Conventional free air thermal current I _{th}		A	320	
Rated insulation voltage U _i IEC/EN		V	1000	
Rated impulse withstand voltage U _{imp}		kV	12	
Operating current I _e				
	AC21A			
		400V	A	320
		500V	A	320
		690V	A	320
	AC22A			
		400V	A	320
		500V	A	320
		690V	A	320
	AC23A			
		400V	A	320
		500V	A	320
		690V	A	320

Dimensions

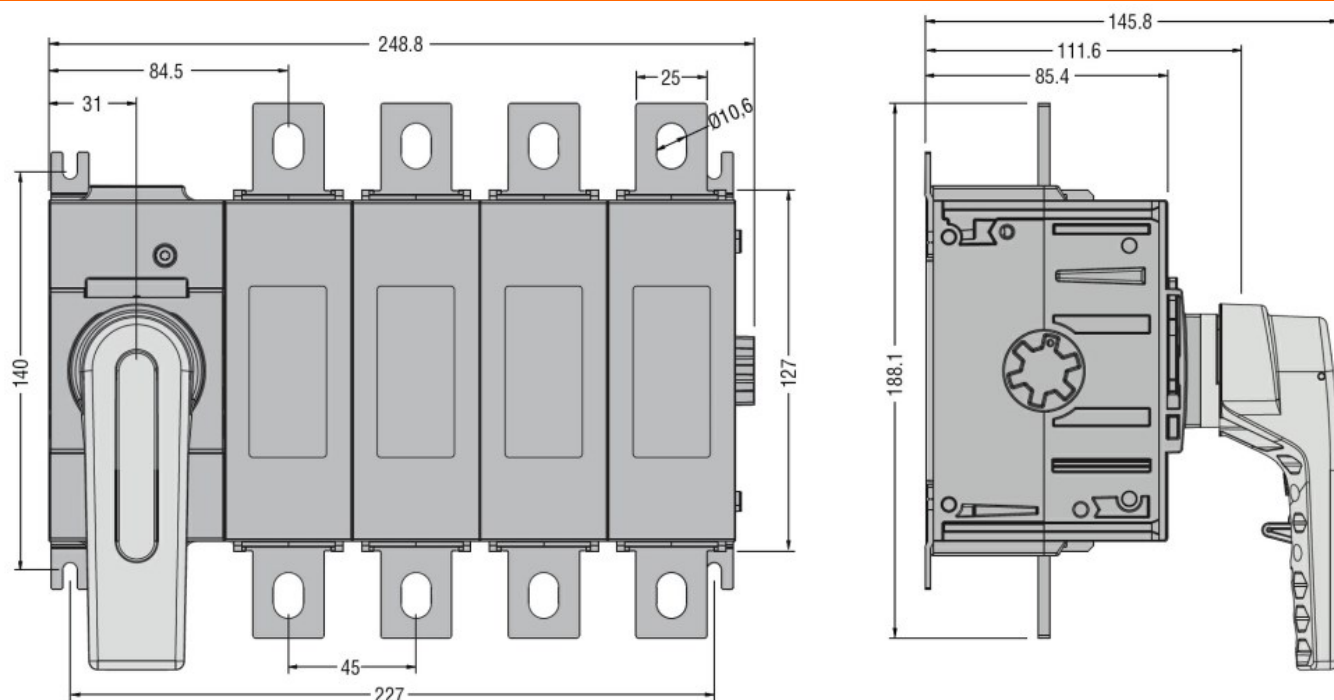

Wiring diagrams



Certifications and compliance

Compliance

IEC/EN 60947-1

IEC/EN 60947-3

ETIM classification

ETIM 8.0

EC002498 -
 Accessories/spare
 parts for low-
 voltage switch
 technology