

1:1

Series 300 – eSafe

- Vented safety function
- High flow capacity
- Strong and durable


Series 300 eSafe couplings offer high flow and require only a low connection force, which ensures a safe working environment. eSafe is a one hand operated safety coupling that vents before disconnection eliminating the risk of hose whip. Male threads on the couplings and nipples feature pre-applied thread sealant. A fully automatic operation ensures quick and easy handling. eSafe complies with ISO Standard 4414 and EN 983.

Series 300 is also available in standard, Soft-Line and Multi-Link versions.



TECHNICAL DATA

Nominal flow diameter	5,5 mm (7/32")
Air flow.....	1050 l/min (37.1 CFM)
Max. working pressure.....	16 bar (232 PSI)
Min. burst pressure.....	140 bar (2030 PSI)
Temperature range	-20°C – +100°C (-4°F – +212°F)
Material coupling.....	Zinc-plated steel/brass
Material nipple.....	Hardened zinc-plated steel
Connection force.....	86 N
Markets.....	Benelux, North America, Switzerland
Standards.....	ARO 210 Standard, 5,5 mm

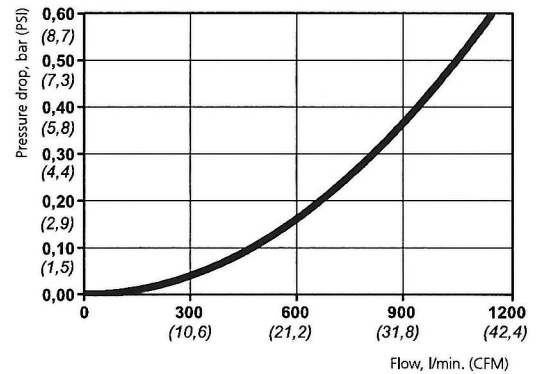

Flow capacity is measured at 6 bar (87 PSI) inlet pressure, and pressure drop at 0,5 bar (7 PSI)

←		Part No.	Connection	←	Part No.	Connection	
ESAFE VENTED SAFETY COUPLING	HOSE CONNECTION	10 300 2002	6.3 mm (1/4")	NIPPLES	HOSE CONNECTION	10 300 5002	6.3 mm (1/4")
		10 300 2003	8 mm (5/16")			10 300 5003	8 mm (5/16")
		10 300 2009	9 mm			10 300 5004	10 mm (3/8")
		10 300 2004	10 mm (3/8")		MALE THREAD	10 300 5151	R 1/8"
		10 300 2005	13 mm (1/2")			10 300 5152	R 1/4"
	10 300 2152	R 1/4"	10 300 5154			R 3/8"	
	10 300 2154	R 3/8"	10 300 5155			R 1/2"	
	10 300 2155	R 1/2"	10 300 5451			NPT 1/8"	
	MALE THREAD	10 300 2452	NPT 1/4"		10 300 5452	NPT 1/4"	
		10 300 2454	NPT 3/8"		10 300 5454	NPT 3/8"	
		10 300 2455	NPT 1/2"		FEMALE THREAD	10 300 5201	G 1/8"
		10 300 2202	G 1/4"			10 300 5202	G 1/4"
		10 300 2204	G 3/8"			10 300 5204	G 3/8"
	10 300 2205	G 1/2"	10 300 5401			NPT 1/8"	
	10 300 2402	NPT 1/4"	10 300 5402			NPT 1/4"	
FEMALE THREAD	10 300 2404	NPT 3/8"	10 300 5404	NPT 3/8"			
	10 300 2405	NPT 1/2"	STREAM-LINE CONNECTION	10 300 5058	5 x 8 mm		
	10 300 2058	5 x 8 mm		10 300 5060	6.5 x 10 mm		
	10 300 2060	6.5 x 10 mm		10 300 5062	8 x 12 mm		
	10 300 2062	8 x 12 mm		10 300 5063	9.5 x 13.5 mm		
10 300 2063	9.5 x 13.5 mm	10 300 5066		11 x 16 mm			
10 300 2066	11 x 16 mm	ESAFE SOFT-LINE COUPLING		STREAM-LINE CONNECTION	10 300 2080	6.5 x 10 mm	
10 300 2080	6.5 x 10 mm		10 300 2082		8 x 12 mm		
10 300 2082	8 x 12 mm						

CEJN reserves the right to make changes without further notification. Thread connections are listed according to ISO Standards. Other connections and sealing material on request. Check with an authorized CEJN distributor for availability and prices. Some part numbers may be subject to minimum order quantities. Please visit our website, www.cejn.com, for general maintenance tips.