


**Mounting accessories**  
**BTS-DSU35-EB1**

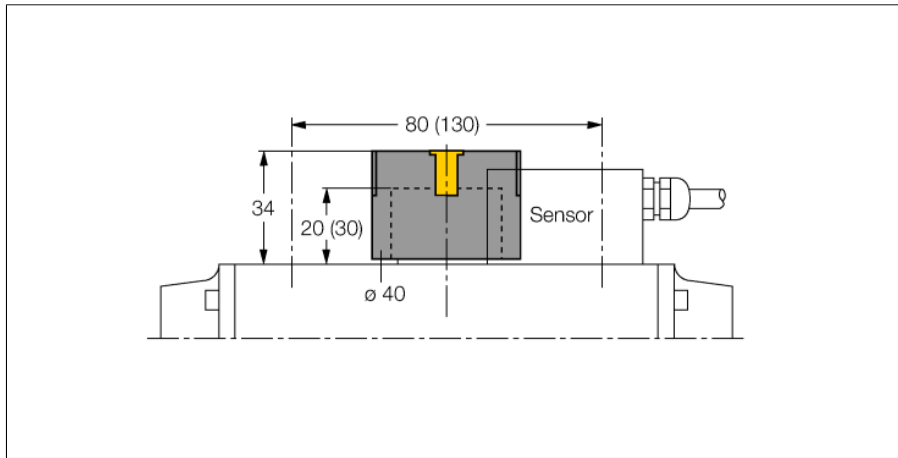

- Actuation kit (puck)
- End position damped
- For clockwise or counter-clockwise rotating drives
- Displays rotatable by 90°
- Hole pattern on flange surface 30 x 80 mm (30 x 130 mm); connection shaft (shaft peg) height 20 (30) mm / Ø max. 30 mm
- Slide ring, max. Ø 34 mm

**General description**

Dual sensors are especially designed for position detection in rotary actuators. They combine the reliability of non-contact inductive sensors with the flexibility of a modular housing system. A broad range of practice-oriented accessories ensure optimal adaption to your system.

<b>Type code</b>	BTS-DSU35-EB1
Ident no.	6900225
<b>Design</b>	accessories for dual sensors, Ni4-DSU35...
Housing material	plastic, PP
Tightening torque	1.5 Nm

